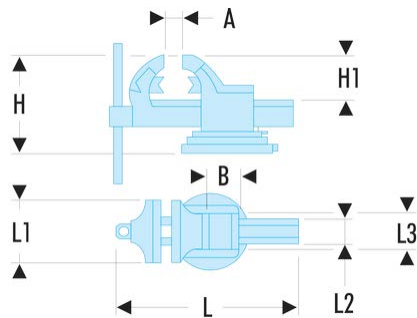


1222.125 1222 - Worksite-maintenance 360° swivel vices**Description:**

- Vices in spheroid graphite cast iron, tensile strength 700 N/mm² minimum.
- Wide bearing base of the prism guide/mobile jaw: lack of guide flexion, vice operation preserved even under heavy loads.
- Interchangeable parallel jaws. High wear resistance, hardness 48/53 HRc.
- Removable V-shaped jaws for tightening the pipes. Hardness 40/46 HRc.
- Adjustment system by 2 complex gap compensation screws.
- Burnished control bar.

A maxi [mm]:	150
B [mm]:	60
H [mm]:	172
H1 [mm]:	82
L [mm]:	402
L1 [mm]:	125
L2 [mm]:	84
L3 [mm]:	51,5
[kg]:	13,800